




Panasonic Lumix DMC-FX07 Top Panel Buttons Replacement

Replace your top panel buttons so you can actually take a picture.

Written By: Karissa

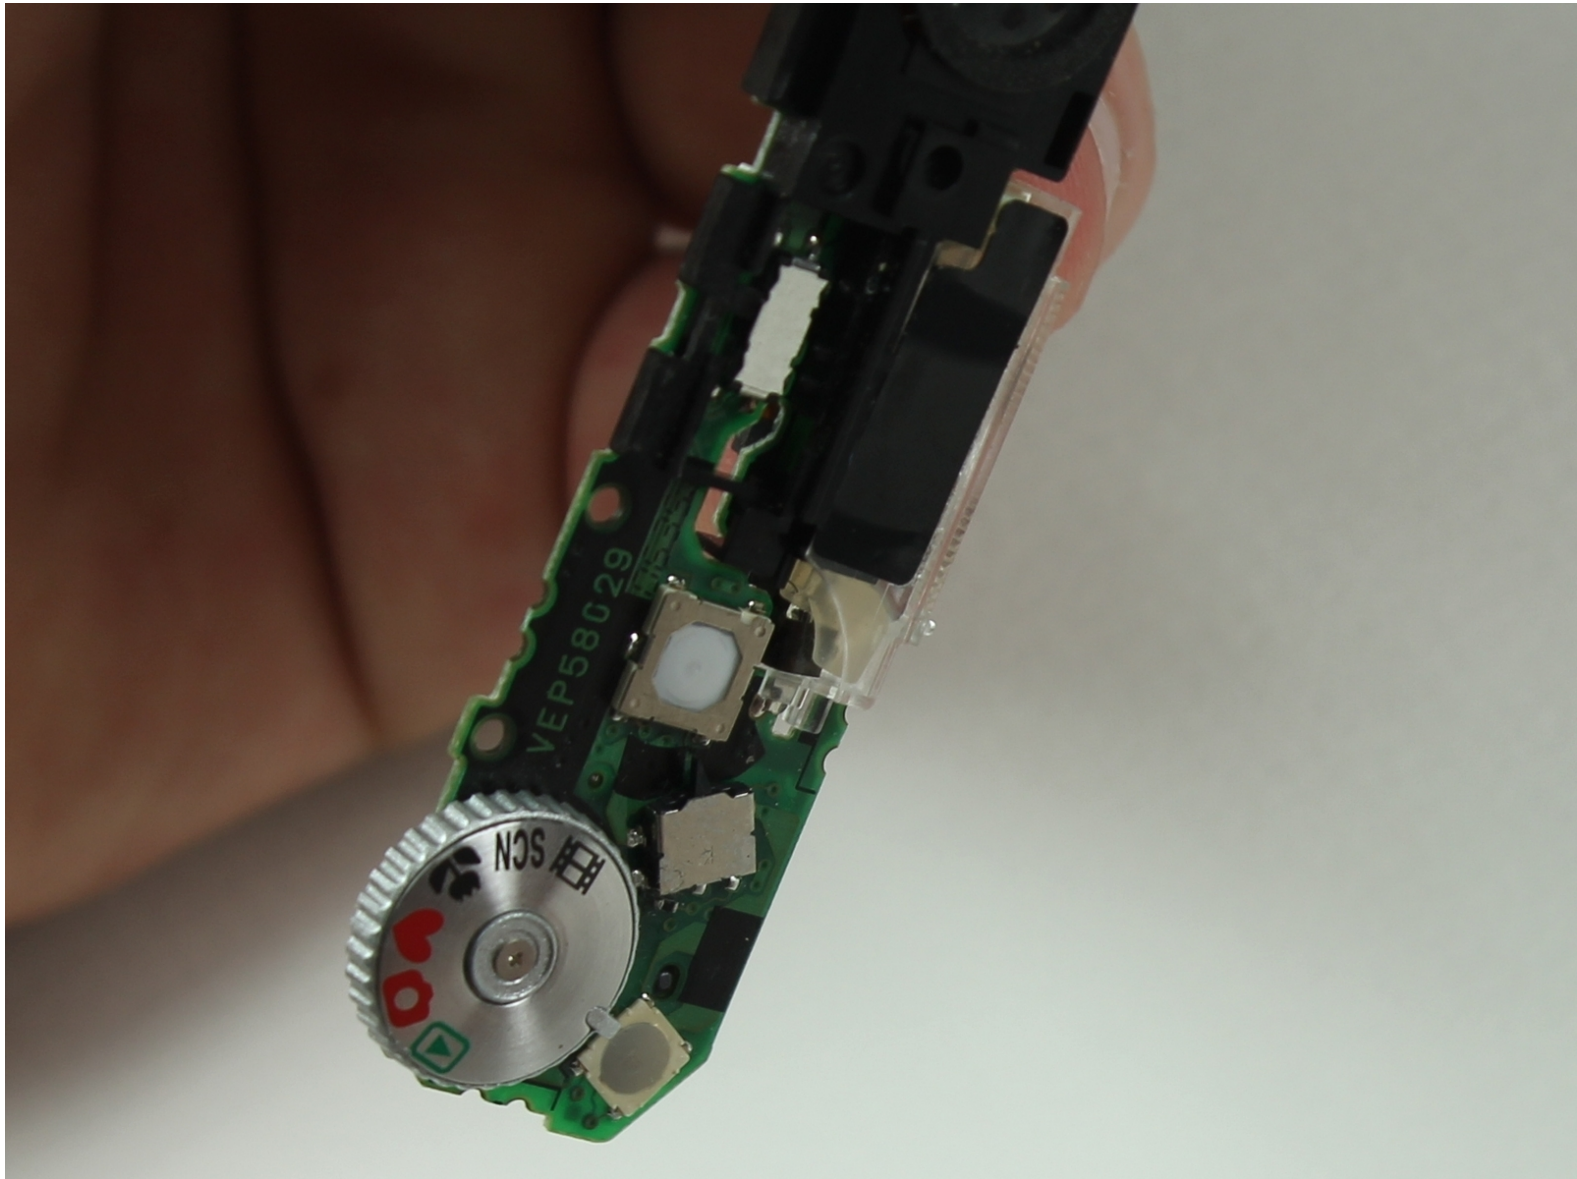

INTRODUCTION


This guide will show you how to remove the top panel buttons so you can install new ones.



TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Battery

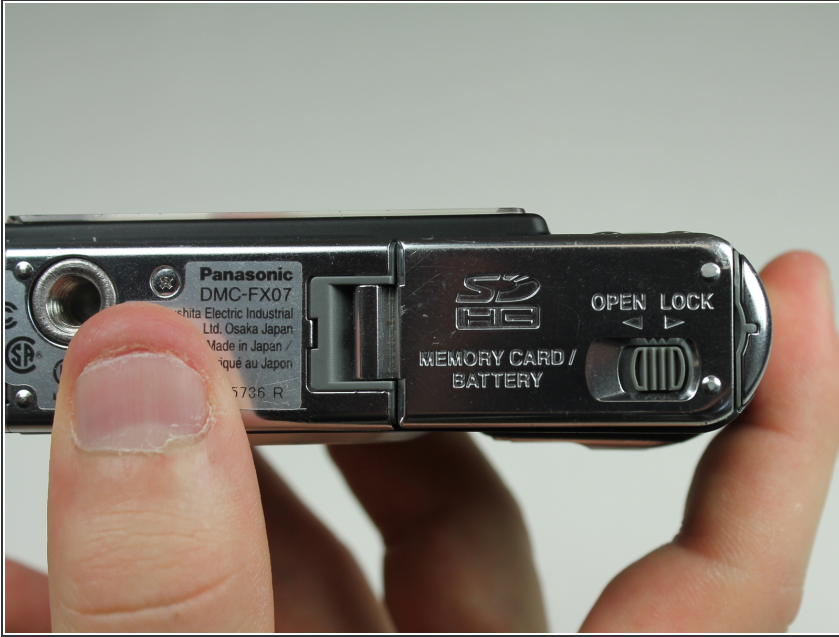

- Move the switch on the battery door to the Open position.
- ⓘ The door will automatically swing open after you let it go.

Step 2




- Push the small gray tab on the top right corner to the left. The battery will pop out slightly.
- Keep your finger clear of the battery when it pops out.

Step 3 — Memory Card




- Push the memory card in and let go.
- ⓘ The memory card will pop out slightly.
- Pull out the memory card.

Step 4 — Back Cover

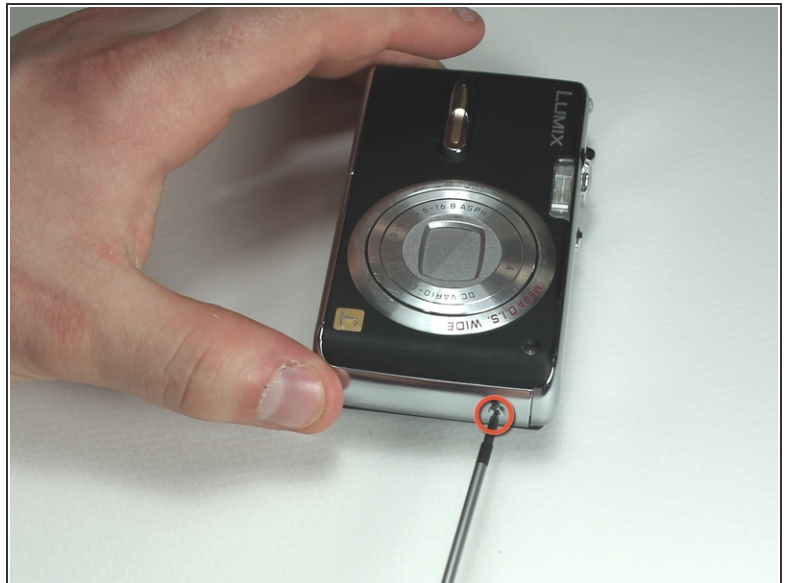

- Unscrew the small screws on the sides of the camera.
- ⓘ The screws on the left side(#00P, 4.7mm) are longer than the screw on the right side(#00P, 3.3mm).


Step 5

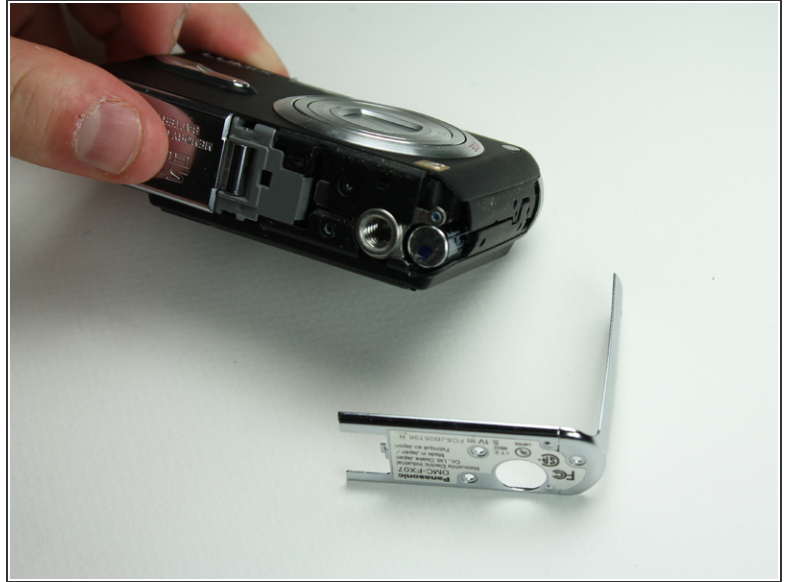

- Unscrew the three small screws on the bottom(#00P, 3.3mm).


i The bottom will fall off.

Step 6

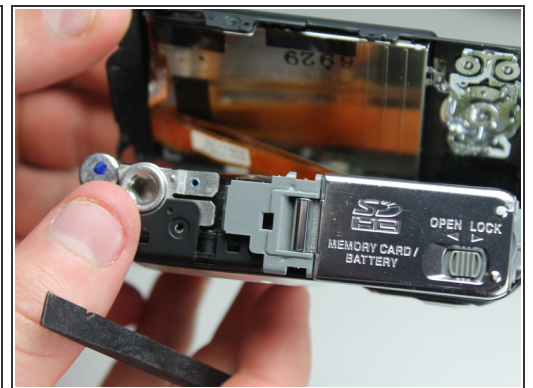

- Lift up the bottom back cover by prying the bottom edge with the spudger.
- Gently lift up the back cover with your hand from the bottom to the top.

Step 7

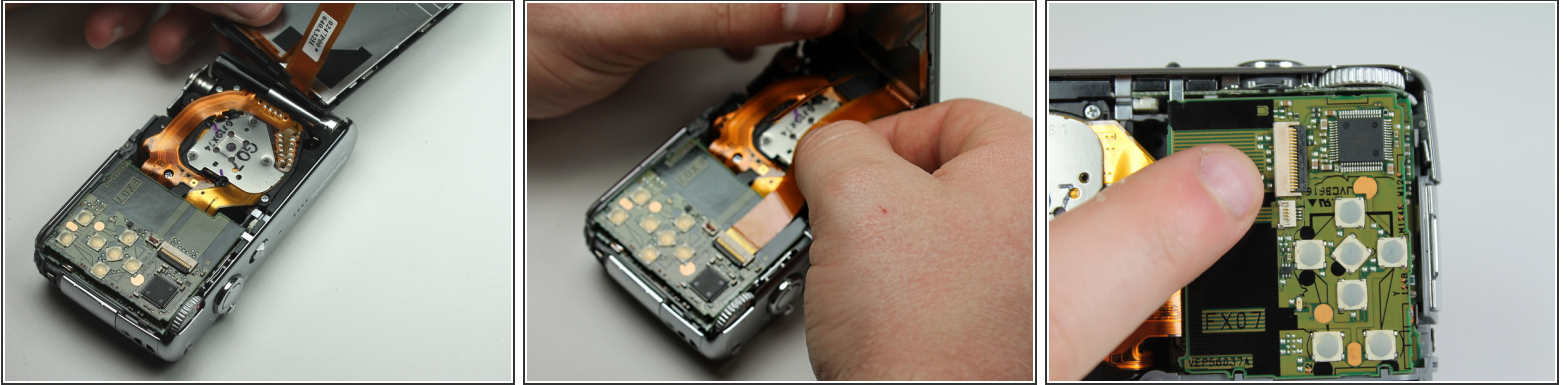

- Lift the tabs on the ZIF connectors.
- The ribbon cables should easily come out of the ZIF connectors.


Step 8 — Top Cover



- Using the spudger, pry off the top cover by gliding the spudger along the entire edge between the top cover and the front cover.




 Be careful not to damage the cylindrical capacitor on the circuit board under the top cover.

Step 9 — Top Panel Buttons

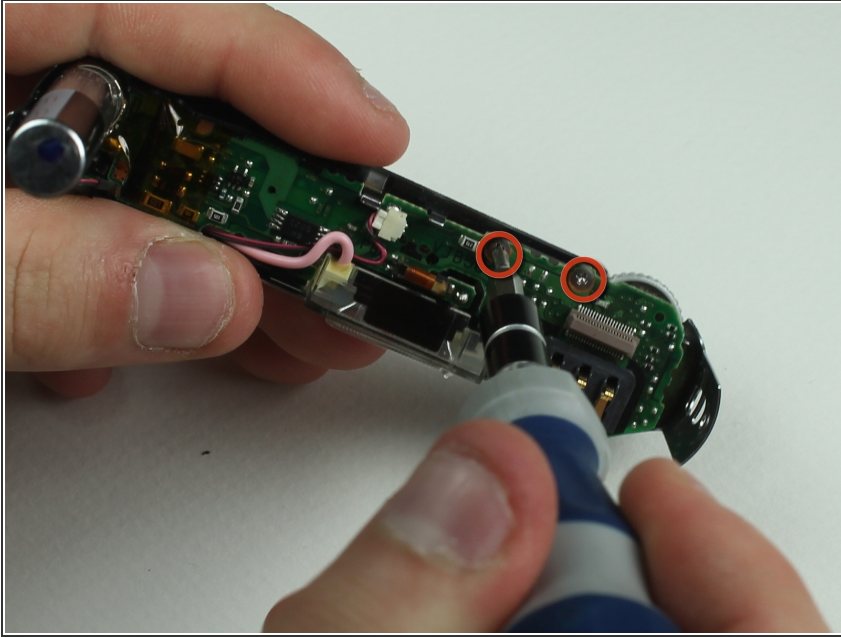


- Unscrew the small screws beneath the top cover(#00P, 1.7mm).


Step 10

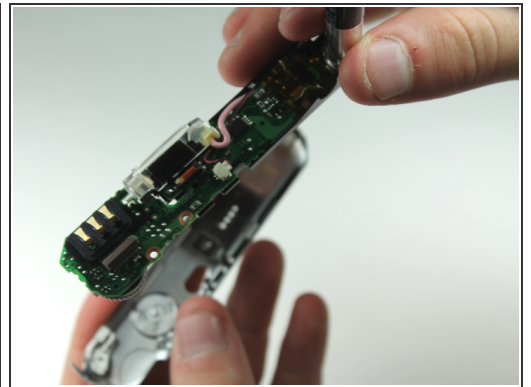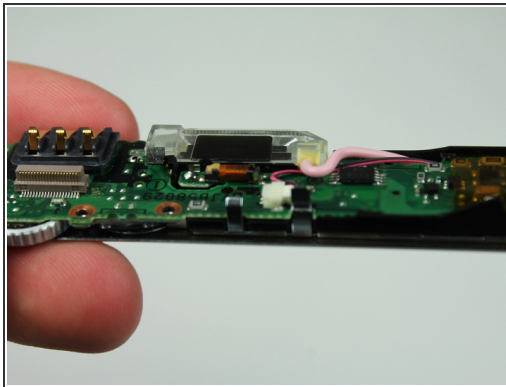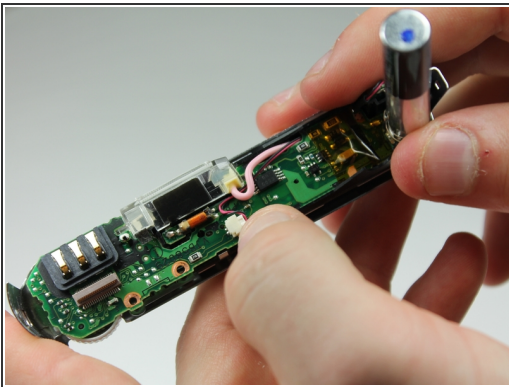

- Lift the motherboard out with your hand by pushing the tabs out and pulling the motherboard up.

 The on/off switch and the anti-shake button may fall out.

Step 11

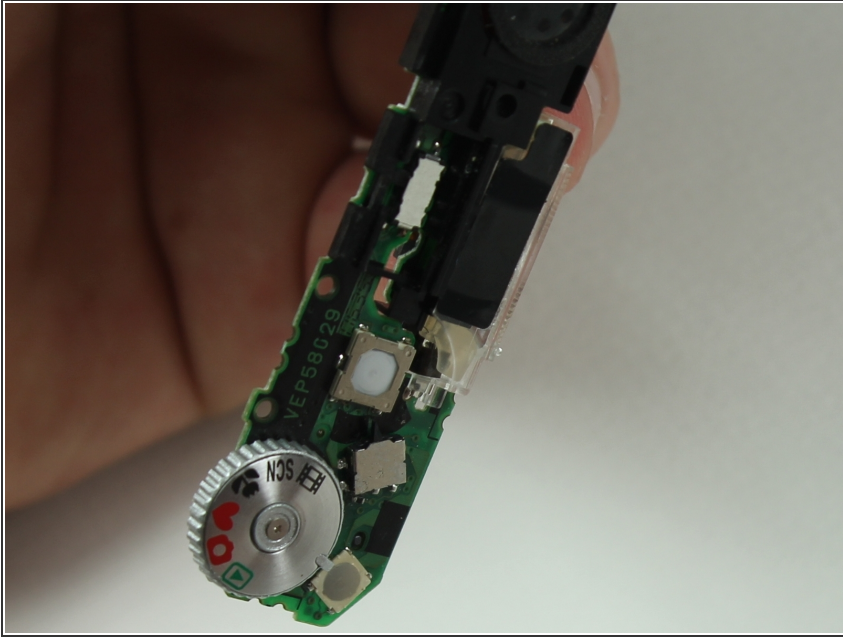

- ⓘ The buttons are hardwired into the top motherboard board.
- To replace the top buttons, you must replace the top motherboard.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-28 09:44:14 AM.